Shenzhen QOHO Electronics Co., Ltd



Dual Lens Vehicle Counting Camera





QH-CP040V

Key Features

- Industrial level design, special vehicle interface, to ensure reliable and stable operation of products in complex environment;
- Professional and stable special file system;
- +12V ~ 36V Wide voltage design, suitable for various models;
- Support 2 alarm inputs;
- Good expansibility, supporting RS485 protocol docking;

Email: sales@qohovisions.com **Skype:** qohocctv : qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street, Baoan district,Shenzhen city, Guangdong province, China.





Specifications

Material	Aluminum				
System	Linux				
Graphic operation interface	Various parameters of the system can be set by display screen and remote control				
Language	Chinese, English, Spanish (Optional) Other (Customizable)				
Alarm	2-way switch signal alarm input				
	Video loss, video blocking alarm				
System upgrade	SD card or Computer				
Power supply and power	ACC on/off;				
consumption	Delay shutdown				
	DC:+12V ~ +36V				
	+12V@0.5A;				
	Normal working state<4W				
Work environment	-20°C ~ +70°C				
	10% to 90%				
Dimensions	133X50X59.65mm				
Weight	0.45KG				
Image sensor	1/3 CCD				
PAL/NTSC	Customizable				
Horizontal clarity	700 TV Lines				
Lens spacing	5mm				
focal length	2.8 mm(2.8mm/3.6mm/4mm/6mm Customizable)				
gain	automatic gain control				
SNR	>48db				
input voltage	12V				
White Balance	auto				
Shutter	1/50-1/80000(S) 1/60-1/80000(S)				

Email: sales@qohovisions.com **Skype:** qohocctv: qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street,


Baoan district, Shenzhen city, Guangdong province, China.





Installation height	install the equipment on the vehicle door (installation height: 2.1~2.4m, width: within1.2m)
Installation position	the label sheet (as shown below) faces inside of the room.
Installation position	Installed in the middle of the channel and above, looking straight down.
Calculation	If vehicle has two door, install 2 counter cameras, counter camera will calculate and display total number at the same time.

In order to count the number of people more accurately, we suggest that you install the equipment near the door or in the aisle where people must pass. The camera should be installed in the middle of the door or aisle. When the camera is installed near the door, the distance from the door shall be more than 15cm; the installation position can also refer to the following figure or can also be installed at the top of the following figure, provided that the ground height and camera height are about 2.1m

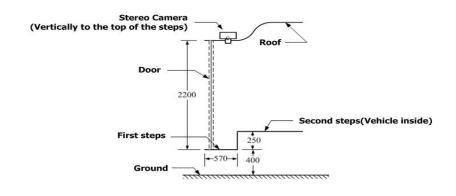

Tel: 0086-755-88832758 **Fax:** 0086-755-61624570 **Website:** www.qohovisions.com


Email: sales@qohovisions.com Skype: qohocctv : qohovisions


Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street,

Baoan district, Shenzhen city, Guangdong province, China.





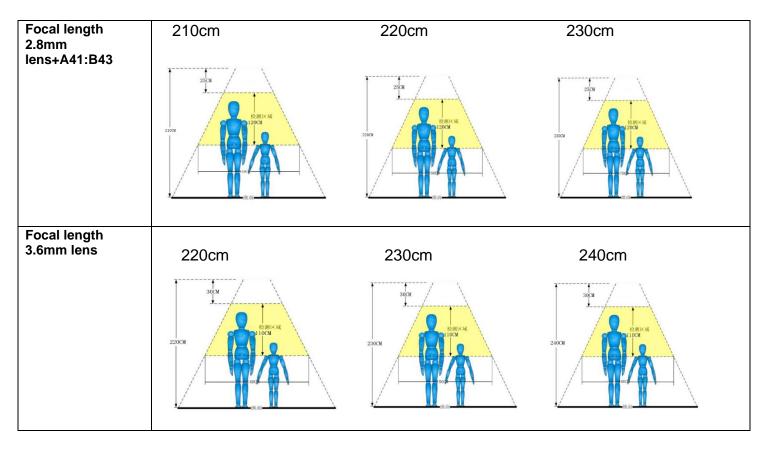

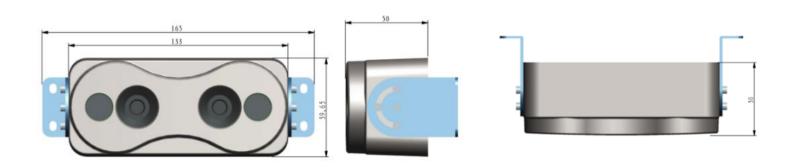


Email: sales@qohovisions.com Skype: qohocctv : qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street, Baoan district,Shenzhen city, Guangdong province, China.





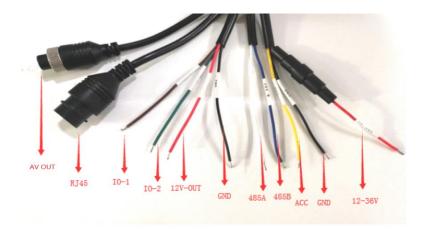







This Product can work with:

4ch 1080P single	4ch 1080P Single	Al Mobile DVR	8ch H.265 1080P
SD card MDVR	SD card Mobile DVR	work with DSM	HDD MDVR

Email: sales@qohovisions.com Skype: qohocctv : qohovisions

Factory Address: 12/F,C area, HuiLongDa Industrial Park,Shiyan street,

Baoan district, Shenzhen city, Guangdong province, China.

